


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 34 TOWNSHIP 17 RANGE 5
DATE: -5-01-02 11-19-07
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison w/sign post by it
METHOD OF ESTABLISHMENT: County: 2-18-97

IN. S.P.C. E ZONE NAD '83
NAME: 17053401
N: 514683.1528(m)
E: 75153.6629(m)

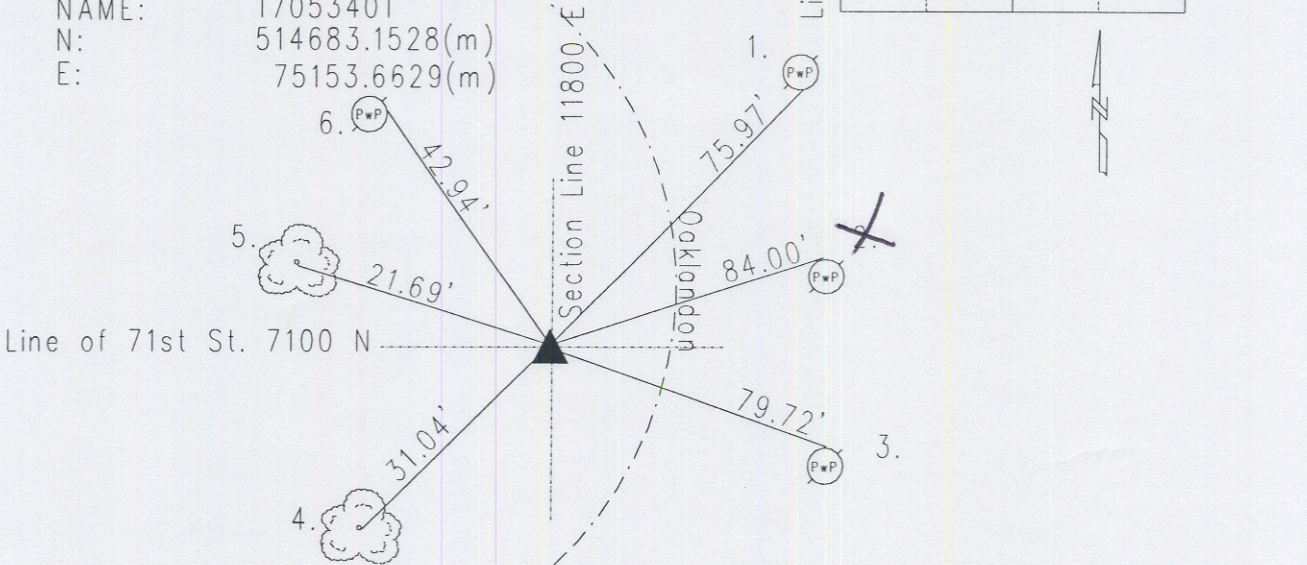

Original post set 1821 by Laughlin with witnesses: 14" sugar maple N 73 W 13 links; 10" buckeye S 7 W 39 links. Legal 2-1849 by Hosbrook per Lawrence Township Legal Survey Book pg. 15 & 36 gives distances E w/one witness. Legal 2-1849 by Hosbrook per Law. Town. Legal Book pg. 16 & 41 gives distances E & S with one witness 'lying down'. New witness 20" elm S 50 E 34 links. Legal 4-1854 per Wilson per Law. Town. Legal Survey Book pg. 14 called corner 'B' stone. Distance given to N & E. Legal 3-1880 by Fatout per Law. Towns. Legal Survey Book pg. 40 gave no info on corner. Legal 12-1886 by Smith per Law. Town. Legal Survey Book pg. 53 gave no info on corner. Legal 1-1931 per Law...pg. 67 called stone gave distance N,W & S. 1-15-1944 ties called 2" pipe distance W to 27-17-5. 1-1944 ties stated set 1-15-44 from data in Legal Survey Record # 4 per Law... pg. 67. 5-28-70 SeFranka did not identify corner. 8-28-75 Sims per MSE called 'stone' by 2" iron pipe w/steel guard stake. 9-4-75 Wilcoxon reflected 8-75 ties. Excavated 8-10-82 Ties hit SMALL stone on SE side of 2" ipe. 1" pipe and bolt spike fd S of lg. stone. Harrison set.

REF.	DISTANCE	DESCRIPTION
1.	75.97'	Mag nail w/brass washer S PwP#137-281 fd 12"up
2.	84.00'	PK nail N PwP no# 12"up
3.	79.72'	PK nail N PwP#163-281 FB 12"up
4.	31.04'	Boat spike SE 54" cottonwood 24"up
5.	21.69'	PK nail w/washer S twin maple (dead) 60"up
6.	42.94'	PK nail E PwP#163-281 FA 36"up